

ACH1180 Audio Host Processor

Features

- 64-pin lead-free/RoHS compliant
- QFN or WLCSP package
- ARM Cortex-M4 with floating point processing option
- Two programmable fractional-N synthesizers to reduce interference
 - Supplies CPU clock frequencies, up to max 200MHz
 - Supplies integrated audio codec
- 832kByte internal SRAM
- SPI serial flash interface
- Support sleep and deep sleep mode for low power consumption
- Integrated high-fidelity stereo audio codec
 - Supports Line-in/out and mic-in/headset out
 - Differential mic input
 - 96dB SNR audio output
 - Optional digital interface (I2S)
- Multiple external interfaces to adapt to various IoT and applications need
 - 2 x UART
 - I2C
 - 2 x low-speed, 10-bit ADCs
 - SPI
 - 11 x GPIO
- Clocks
 - Reference clock input 26MHz
 - Low power clock input at 32.768 kHz
 - 2 x clock outputs

Description

The ACH1180 is a single-chip host processor solution that is fully optimized for Audio and IoT applications. Built with ARM Cortex-M4, floating point, this host processor runs up to 200MHz (250 DMIPS), and is ideal for audio and video processing. It integrates 832K bytes of embedded SRAM for code and data execution. It also integrates a high-fidelity, 96dB SNR stereo audio codec for audio applications, with two fractional-N synthesizers to provide separate clock frequencies to CPU and audio codec to reduce audio interference. Equipped with various external interfaces, ACH1180 can be design in numerous types of host application scenarios. The ACH1180 also supports a crystal driver interface, thus able to generate reference clock to various wireless connectivity radio controllers, such as Wifi/Bluetooth/Zigbee.

With WLCSP and QFN package, it supports a high level of integration, compact and cost effective designs, and delivers fast time-to-market.

Contents

1. Introduction	3
2. General Hardware Description	3
2.1. Block Diagram	3
2.2. Pin functions.....	4
3. Reset	7
3.1. Boot modes	7
4. Clock specifications	7
5. Electrical Characteristics	8
5.1. Absolute maximum ratings	8
5.2. Operating ranges.....	8
5.3. Digital I/O specifications	8
6. Package mechanical data.....	9
7. Revision history	9

1. Introduction


The ACH1180 is a host processor single-chip solution, fully optimized for audio DSP and wireless host embedded applications featuring an ARM Cortex-M4 floating point processor. Integrating a high-fidelity stereo audio codec, it can support differential microphone inputs, headphone output, and Line-in/out. It also includes two fractional-N PLL blocks providing different high accuracy clocks, for the main CPU and audio codec – significantly reducing interference. The main CPU system can run up to 200MHz for an intensive audio/video applications, audio DSP processing, and general purpose application hosting. The ACH1180 also comes with 832K byte internal run-time SRAM. With a variety of external interfaces, UART, SPI, I2C, I2S, ADCs, and GPIOs, it can be easily support designs for most applications with lower BOM and external component cost.

The ACH1180 is an audio host processor device packaged in Wafer Level Chip Scale Package (WLCSP) or QFN package.

2. General Hardware Description

2.1. Block Diagram

Figure 1. ACH1180 detail internal block diagram

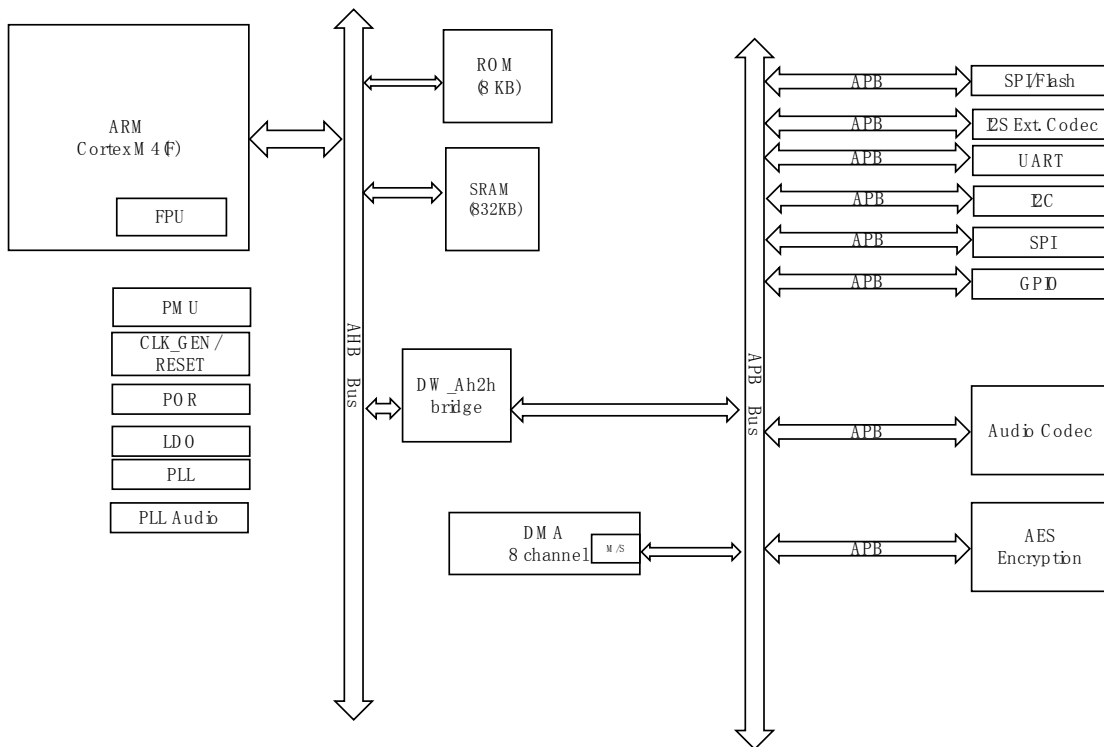

2.2. Pin functions

Table 1. ACH1180 functional and supply pin list (WLCSP)

Name (Default)	Alternate usage ALT_0	Alternate usage ALT_1	Description
Digital Signal			
SPI0_MOSI	UART1_CTS		RF Controller Interface
SPI0_NSS	UART1_RTS		
SPI0_SCK	UART1_TX		
SPI0_MISO	UART1_RX	GPIO_8	
UART0_TX			UART0
UART0_RX			
UART0_CTS			
UART0_RTS			
JTDI	UART2_RX	GPIO_10	JTAG
JTDO	UART2_TX	GPIO_11	
TRSTn	UART2_CTS	GPIO_9	
GPIO_0	UART2_RTS		
GPIO_1	I2S1_WS	SPI1_CS	GPIO
GPIO_2	I2S1_CK	SPI1_CLK	
GPIO_3	I2S1_RX	SPI1_MISO	
GPIO_4	I2S1_TX	SPI1_MOSI	
GPIO_5			
SPI2_SCK			SPI2 Serial NOR Flash
SPI2_SS			
SPI2_SDO			
SPI2_SDI			
TCK/SWCLK	GPIO_6		JTAG or User Interface
TMS/SWDIO	GPIO_7		
I2C0_SDA			I2C0
I2C0_SCL			
Clock Signal			
OSC32_IN			32kHz crystal input
OSC32_OUT			32kHz crystal input (differential pair)
OSC_IN			26MHz crystal input
OSC_OUT			26MHz crystal input (differential pair)
MCLK			Audio PLL Clock output
MCO			Main PLL Clock output
CLK32K_OUT			32kHz buffer clock output
Audio Signal			

MICIP_L			Microphone Input
MICIN_L			
MICIP_R			
MICIN_R			
VIP_L			Line-In
VIN_L			
VIP_R			
VIN_R			
ROUT			Line-Out
LOUT			
RHPOUT			Headset Output (8 ohms)
LHPOUT			
Control Signal			
RESET			Reset (Active Low)
BOOT			Test pin
Analog Signal			
ADC0			10-bit ADC
ADC1			10-bit ADC
Reference Signal			
Vcap			
Vref			
MICBIAS			Mic Bias

Name (Default)	Alternate usage ALT_0	Alternate usage ALT_1	Description
Power Supply			
VCCA_PLL1			PLL1 power and ground
GND_PLL1			
VCC_HP			CODEC and Headphone power and ground
GND_HP			
VCCA_PLL0			PLL0 and ADC power and ground
GND_PLL0			
VDD_CORE_IO			VDD
VDD_CORE_IO			
VDD_CORE_IO			
VSS_CORE_IO			GND
VSS_CORE_IO			
VSS_CORE_IO			

3. Reset

3.1. Boot modes

An embedded BOOT ROM will run at startup.

When the BOOT PIN is low (0), the SPI 2 is used to load an 8K byte section of an external Flash memory into the internal RAM: loads 8K bytes from location 0x00000000 external Flash to location 0x20000000 internal RAM.

When the BOOT PIN is high (1), the UART 0 boot mode interface will become active. This interface allows data to be loaded from UART 0 into RAM using a set of boot commands. Note that these boot commands are generally used for testing and are not included in this document.

4. Clock specifications

The ACH11800 uses two clocks: a reference clock and an optional low power clock. For the reference clock, the ACH1180 can either use an external reference clock source or generate its own reference using a XTAL. The low-power clock must always be supplied from an external source.

Table 2. Main crystal specifications

Symbol	Parameter	Min	Typ	Max	Unit
External crystal					
F _{IN}	Clock input frequency list	26			MHz
F _{INTOL}	Tolerance on input frequency (typical)	-20	-	+20	ppm

Table 3. Low power clock specifications

Symbol	Parameter	Min	Typ	Max	Unit
F _{IN}	Clock input frequencies	32.768			kHz
F _{INTOL}	Tolerance on input frequency	-1000	-	+1000	ppm

5. Electrical Characteristics

5.1. Absolute maximum ratings

The Absolute Maximum Rating (AMR) corresponds to the maximum value that can be applied without leading to instantaneous or very short-term unrecoverable hard failure (destructive breakdown).

Table 4. Absolute maximum ratings

Symbol	Parameter	Min	Max	Unit
V_{DD}	Digital Supply voltages	-0.3	+3.3	V
V_{CCA_PLL}	Analog PLL Supply voltage	-0.3	+3.6	V
V_{CC_HP}	Supply voltage I/O	-0.3	+3.6	V
$V_{CCA_MAIN_PLL}$	Supply voltage I/O	-0.3	+3.6	V
V_{in}	Input voltage on any digital pin	-0.3	+3.3	V
V_{ssdiff}	Maximum voltage difference between different types of Vss pins	-0.3	+0.3	V
T_{stg}	Storage temperature	-65	+100	°C

5.2. Operating ranges

Operating ranges define the limits for functional operation and parametric characteristics of the device. Functionality outside these limits is not guaranteed.

Table 5. Operating ranges

Symbol	Parameter	Min	Typ	Max	Unit
T_{amb}	Operating ambient temperature	-30	+25	+70	°C
V_{DD}	Digital Supply Voltage	+1.8	+2.5	+3.3	V
V_{CCA_PLL}	Analog Audio PLL Supply Voltage	+1.8	+2.5	+3.6	V
V_{CC_HP}	Analog Headset Supply Voltage	+2.5	+3.3	+3.6	V
$V_{CCA_MAIN_PLL}$	Analog Main PLL Supply Voltage	+1.8	+3.3	+3.6	V

5.3. Digital I/O specifications

All I/Os, except analog I/Os or otherwise specified are standard I/Os with levels complying with the EIA/JEDEC standard JESD8-7.

Table 6. DC and AC input specifications

Symbol	Parameter	Min	Typ	Max	Unit
Input levels					
V_{IL}	Low-level input voltage	0	-	$0.35 * V_{DD_IO}$	V
V_{IH}	High-level input voltage	$0.65 * V_{DD_IO}$	-	-	V
V_{hyst}	Schmitt trigger hysteresis	150	-	-	mV
T_r/T_f	Rise and fall time that can be present on inputs	-	-	25	ns

R_i	Input resistance	1	-	-	$M\Omega$
C_i	Input capacitance	-	-	5	pF
Output levels					
V_{OL}	Low-level output voltage (@ +100 μ A)	0	-	0.2	V
V_{OH}	High-level output voltage (@ -100 μ A)	$V_{DD_IO} - 0.2$	-	V_{DD_IO}	V
T_r/T_f	Rise and fall time that can be present on outputs at $C_{load} = 20$ pF max	-	-	10	ns

Table 7. Pull-up and pull-down characteristics

Symbol	Parameter	Condition	Min	Typ	Max	Unit
R_{PU}	Equivalent pull-up resistance	$V_{DD_IO} = 0$ V	-	50	-	$k\Omega$
R_{PD}	Equivalent pull-down resistance	$V_{DD_IO} = 1.8$ V	-	50	-	$k\Omega$

Table 8. IOL and IOH characteristics

Symbol	Parameter	Condition	Min	Typ	Max	Unit
I_{OL}	Sink current	$V_{OL} = \text{Max}$	$X^{(1)}$	-	-	mA
I_{OH}	Source current	$V_{OH} = \text{Min}$	$X^{(1)}$	-	-	mA

1. X can be 2, 4, or 8 depending on the type of the I/O (X denotes the drive strength of output stage).

Note: If the V_{DD_IO} supply is powered down, external activity on the IOs is not allowed.

6. Package mechanical data

The device ACH1180 is in lead-free/RoHS-compliant 64-pin WLCSP package or QFN package

7. Revision history

Date	Revision	Changes
8/21/2018	1.0	Preliminary version